
Overhaul Manual



OH 381
C300 356

Copyrighted Material
Intended for CLARK dealers only
Do not sell or distribute

CLARK

333 West Vine Street
Lexington, KY
40507-1640

INDUSTRIAL TRUCK DIVISION
CUSTOMER SERVICES GROUP

T A B L E O F C O N T E N T S

<u>GROUP</u>	<u>SECTION</u>	<u>PAGE</u>		
00	00TS152A-Z		--	Engine Overhaul
00	00M552AF, SUPP. A-H		--	Engine Reassembly
00	00S152A-B		--	Engine Specifications
00	00S152C SUPP. A-L		--	Engine Specifications
00	00S152D		--	Engine Specifications
00	00S152E-N		--	Limits And Clearances
02	02M160A-F		--	PC1 Carburetor Overhaul
02	01	1-5	OH-373	IMPCO Carburetor Overhaul
02	02	1-16	PMA-274	IMPCO LPG Fuel System
02	05	1-11	OH-373	IMPCO LPG Lock-Off Valve
02	06	1-12	OH-373	IMPCO LPG Vaporizer-Regulator
02	11	1-13	OH-367	Marvel-Schebler Carburetor Overhaul
06	03	1-47	OH-381	Hydratork Transmission Overhaul
11	11M103A-F		--	Delco-Remy Cranking Motor Overhaul
11	11M601A-H		--	Delco-Remy Distributor Overhaul
11	03	1-20	OH-367	Prestolite Distributor Overhaul
12	01	1-9	OH-301	Delco-Remy Generator Overhaul
12	03	1-20	OH-372	Delco-Remy Generator Overhaul
12	05	1-9	OH-369	Electrical Checks
20	05	1-10	OH-369	Axle End Overhaul
23	02	1-6	OH-224	Brake Master Cylinder Overhaul
23	09	1-9	OH-337	Service Brake Overhaul
25	02	1-17	OH-336	Char-Lynn Power Steering Gear Overhaul
26	09	1-13	OH-372	Power Steering Cylinder Overhaul
29	07	1-16	OH-369	Vickers Hydraulic Pump Overhaul
30	01	1-15	OH-321	Hydraulic Valve Overhaul
31	02	1-4	OH-224	Tilt Lock Valve Overhaul
32	06	1-9	OH-334	Tilt Cylinder Overhaul
34	01	1-52	OH-336	Upright Lift Cylinder Overhaul
40	12	1-7	OH-377	Safety Instructions, General Info.

DO NOT FLUSH CRANKCASE WITH KEROSENE

Some operators unwisely put kerosene in the crankcase after draining the engine oil, then turn the engine over with the starter — in the belief they are doing a better job of crankcase cleaning.

In doing this, kerosene is circulated through the oil pump, the main oil header and the branches leading into the engine bearings — thereby washing away the protective oil film. In addition, some of the kerosene will be trapped and remain to thin out the new oil, reducing its lubricating qualities.

Do not put kerosene into the crankcase. The best method is to drain the oil when the engine is thoroughly heated — which will carry off most of the sediment.

AIR CLEANER

All engines, when operating, consume several thousand cubic feet of air per hour. Since dusty air is full of abrasive matter, the engine will soon wear excessively if the air cleaner does not remove the dust before entering the cylinders.

Two basic types of air cleaners are normally used — the oil bath type and the dry replaceable element type.

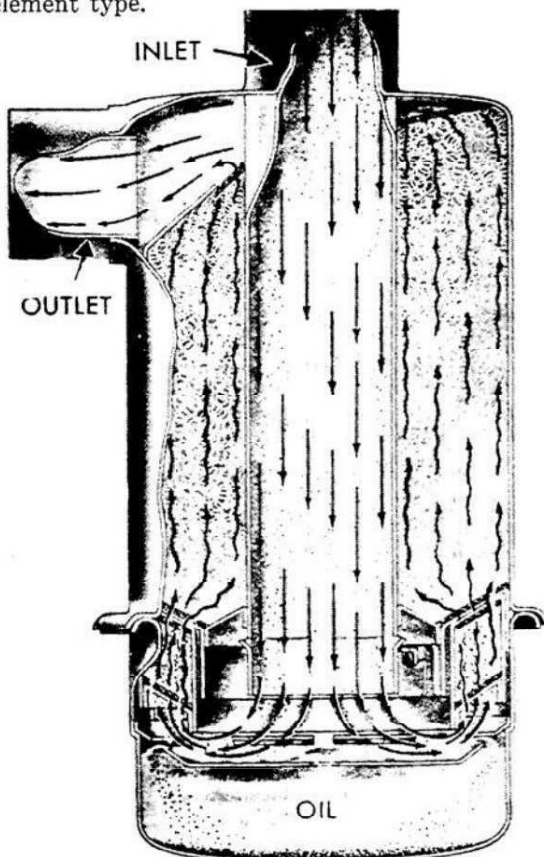


Figure 12 — Sectional View of Oil Bath Air Cleaner

Operating conditions determine the air cleaner service periods. In extremely dusty operations, this may be once or twice daily. In dust protected

areas, the air cleaner should be serviced when changing oil.

As the dirt is strained from the air flowing through the cleaner, it thickens the oil in the cup and raises the level. If the level is too high, agitation of the oil on the screen is affected and gritty oil is carried over into the air stream, through the carburetor and into the engine cylinders. This would actually introduce a grinding compound with resulting very rapid wear.

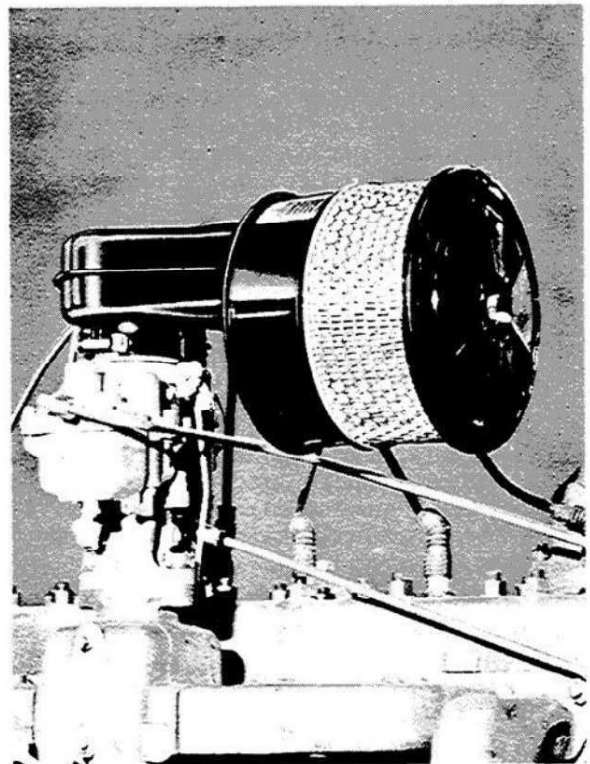


Figure 13 — Dry Replaceable Element Type Air Cleaner

By actual measurement, the amount of dust shown below, when admitted in the volume shown every hour, will completely ruin an engine in an eight hour day.

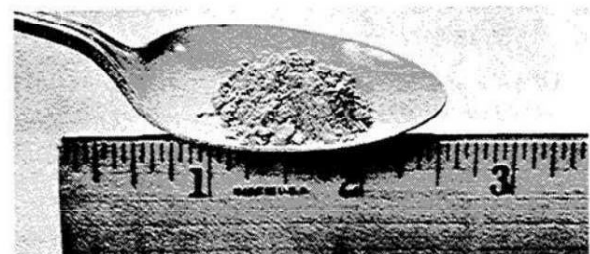


Figure 14

Proper servicing means **Cleaning Thoroughly and Refilling with New Engine Oil, and Maintaining Air-Tight Connections** between the air cleaner and intake manifold so that **All Air Entering The Engine Is Filtered.**

**ENGINE REPAIR AND
OVERHAUL**

This section includes instructions for repairs and overhaul of the component units of Continental Red Seal L-Head engines.

Provide a clean place to work and clean the engine exterior before you start disassembling — dirt causes engine failures. Many shop tools have been developed to save time and assure good workmanship; these should be included in your equipment.

Use only genuine Red Seal parts in Continental engines since years of development and testing have gone into these specifications to assure maximum life and performance.

CYLINDER HEAD

The cylinder head is an important part of the engine assembly since it contains the complete combustion chamber and cored passage for water flow. Remove the cylinder head in the following sequence:

1. Drain water from engine and disconnect radiator or heat exchanger outlet hose.
2. Loosen and remove the nuts holding the cylinder head to the block.
3. Lift the cylinder head off the engine and carry to a clean bench for further disassembly.
4. Remove all carbon from combustion areas using a scraper and wire brush.

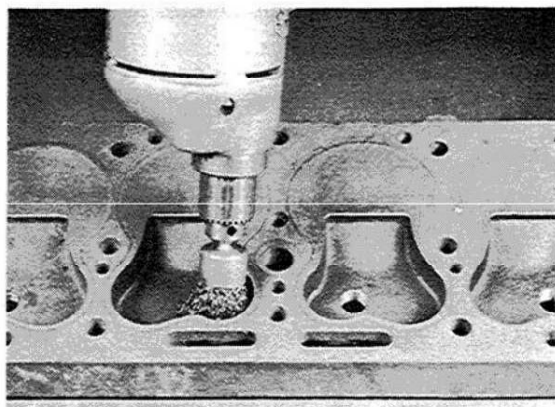


Figure 15 — Cleaning carbon from combustion chamber

5. Clean the cylinder head thoroughly with a solvent or degreasing solution and blow it off with air pressure.

6. Make sure that gasket contact surfaces on the head and block are clean, smooth and flat.

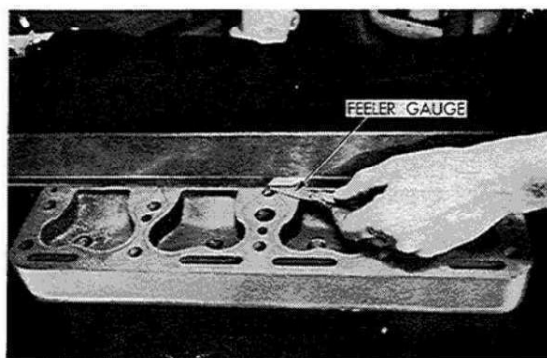


Figure 16 — Checking cylinder head flatness lengthwise.

7. Check out-of-flatness with straight edge and feeler gauge: maximum permissible is .00075 inches per inch of width or length. Thus, for a cylinder head 16" long, maximum permissible lengthwise out-of-flatness is .012". Out-of-flatness should vary gradually and uniformly from end to end and side to side. Localized depressions or high spots should not exceed .003.

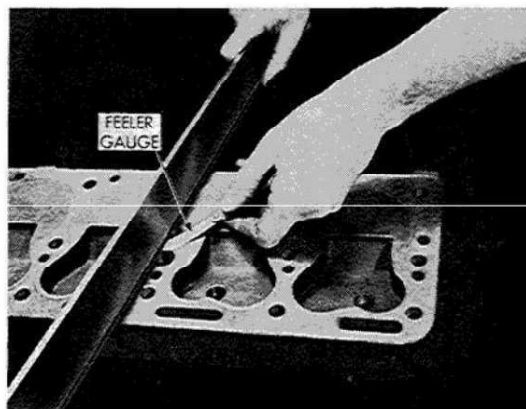


Figure 17 — Checking cylinder head flatness crosswise.

CYLINDER BLOCK

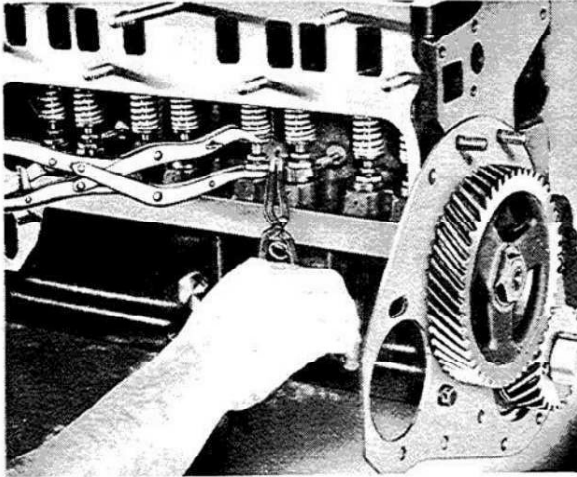


Figure 18 — Valve Removal

1. With a valve spring lifter, compress the springs and remove the locks or pins from the valve stems which are in a closed position. Close the other valves by rotating the crankshaft and remove the locks (or pins) from these valves in the same manner. Remove all valves and place in order in a rack, with holes numbered for both intake and exhaust valves so they will not be mixed in handling.

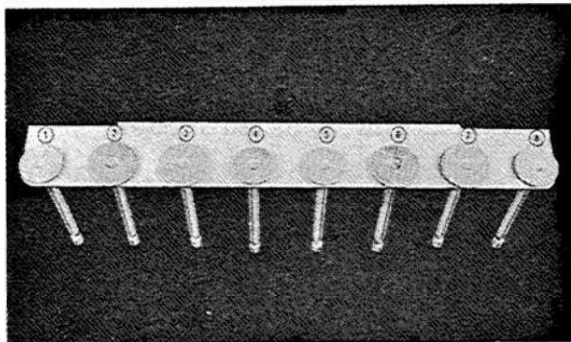


Figure 19 — Valves in rack

VALVE GUIDES

1. Clean the valve stem guides, removing lacquer or other deposits by running a valve guide cleaner or wire brush through the guides.

2. Check guides for wear by using "Go and No-Go" plug gage or a telescope gage and 1" micrometer. Replace all guides that are worn bell-mouthed and have increased .0015 in diameter. See Limits and Clearance Section for maximum diameter permissible to determine actual amount the diameter has increased. Remove all valve guides when necessary by using an arbor press and pressing them out from the combustion chamber side with a driver slightly smaller than the O.D. of the valve guide.

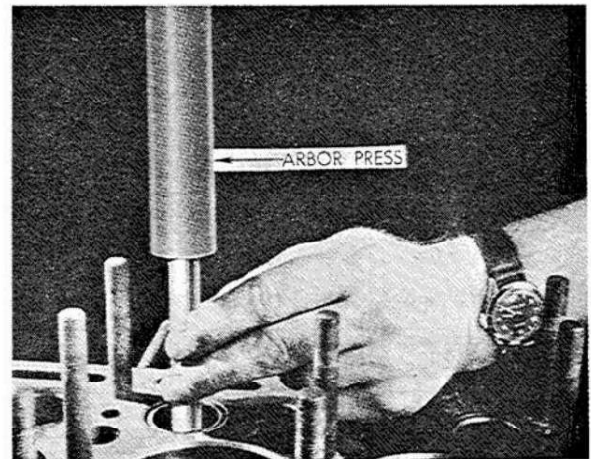



Figure 20 — Removing valve guides

3. Replace worn guides as required by using a suitable driver and an arbor press from the combustion side to the correct depth below the valve seat as given in the Limits and Clearance Chart.

VALVE SEAT INSERTS

1. The exhaust valve seat insert is held in place by a shrink fit.

Inspect all exhaust valve inserts in the block and replace any that are loose, cracked or otherwise damaged. Use puller for removing faulty insert as shown in illustration.

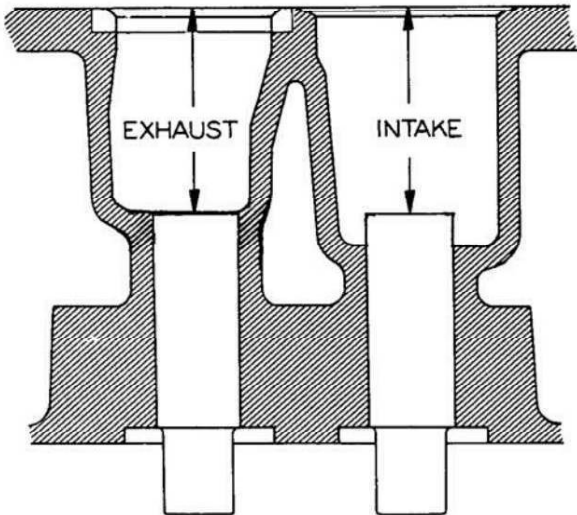

Engine	Distance from Block Face to Top of Guide	
	Intake	Exhaust
N56, N62	$2\frac{5}{32}$	$2\frac{5}{32}$
Y69, Y91, Y112	$\frac{7}{8}$	$\frac{7}{8}$
F-4, F-6 Series	$1\frac{11}{32}$	$1\frac{11}{32}$
M271, M290 M330, M363	$1\frac{1}{4}$	$1\frac{9}{16}$
B371, B427	$1\frac{7}{8}$	$1\frac{5}{16}$

Figure 21 — Diagram and chart showing valve guide location

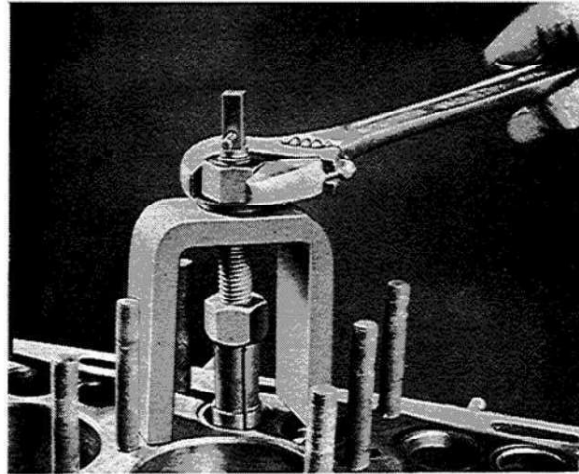


Figure 22 — Removing exhaust valve seat insert

2. When required to replace with new insert, clean and counterbore for .010 larger insert using counterbore tool with correct fitting pilot.

When machining the counterbore, be sure to go deep enough with the tool to clean up the bottom so that the insert will have full contact to carry away the heat.

Continental does not recommend installing new inserts having the same outside diameter as the one removed. The following chart shows the dimensions of Standard Inserts and counterbores:

DIMENSIONS OF STANDARD INSERTS AND COUNTERBORES

Engine Model	Outside Dia. of Insert (A)	Inside Dia. of Counterbore (B)	Press Fit
N-56 N-62	1.068-1.067	1.063-1.062	.004-.006
Y-69 Y-91 Y-112	1.1295-1.1285	1.1255-1.1245	.003-.005
F124 F135 F140 F163 F244 F245 F162	1.3485-1.3475	1.3445-1.3435	.003-.005
F-186 F-209 F-226 F-227	1.442-1.441	1.438-1.437	.003-.005
M-271 M-290 M-330 M-363	1.692-1.691	1.688-1.687	.003-.005
B-371 B-427	1.8785-1.8775	1.8755-1.8745	.003-.005

CAUTION: When replacing guides that are ferrox coated do not ream since these are all pre-reamed before being ferrox coated — any further reaming will remove the coating.

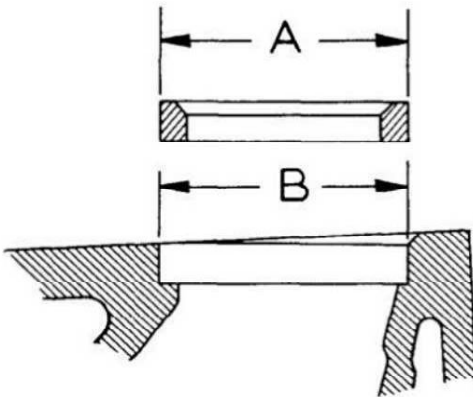


Figure 23 — Insert and counterbore

When OVERSIZE inserts are used, dimensions of the insert and counterbore increase proportionately (.010, .020 — depending on the oversize).

New insert installation should have a press fit. Chill insert in container with dry ice for 20 minutes before assembling.

Insert may then be installed in the counterbore using a piloted driver, tapping in place with very light hammer blows, without the possibility of shearing the side walls. This assures it being seated firmly on the bottom of the counterbore.

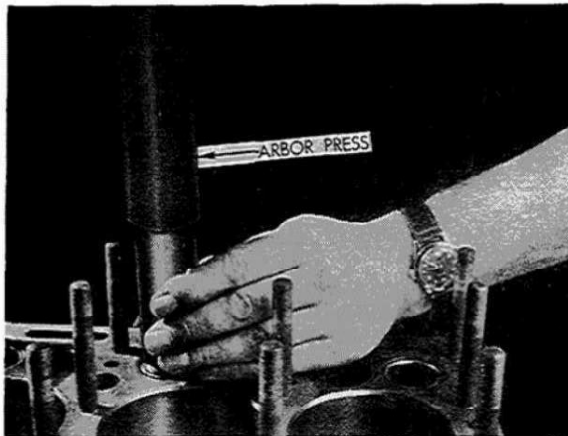


Figure 24 — Installing valve seat insert with an arbor press

3. Grind the intake and exhaust valve seats in the block in accordance with instructions in the limits and clearance chart and before removing the arbor, indicate the seat. Total indicator reading of the run-out must not be more than .002". Use a pilot having a solid stem with a long taper, as all valve seats must be ground concentric and square with either new or worn valve stem guide holes.

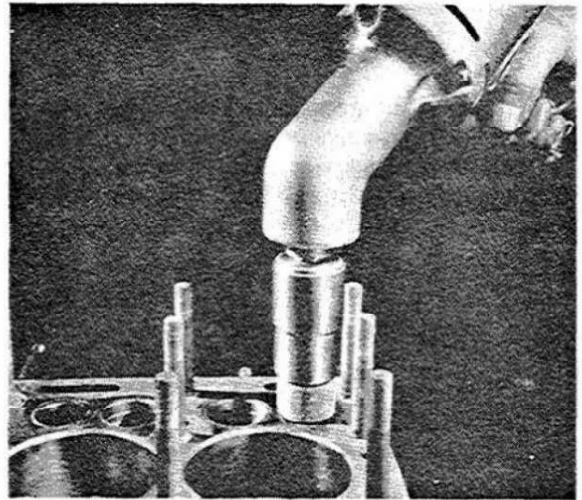


Figure 25 — Grinding Valve Seat

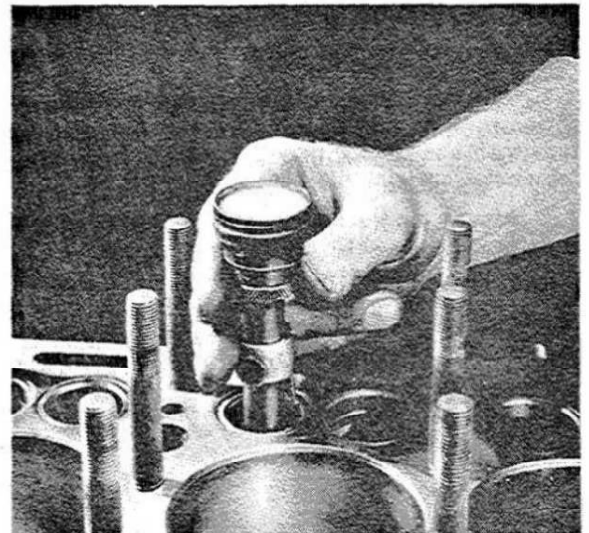


Figure 26 — Indicating Valve Seat

VALVES

1. Inspect valves for condition and replace any that are "necked", cracked or burned, also any on which valve stems are bent or worn more than .002 over the maximum allowable limits. Reface or replace all valves.

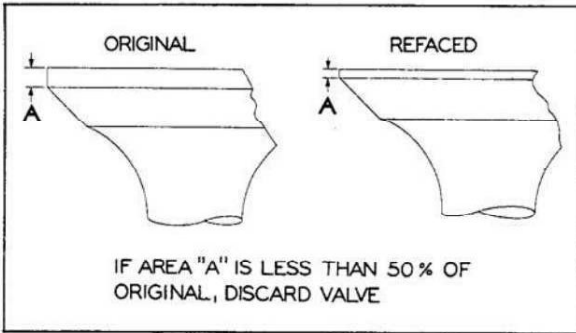


Figure 27 — Allowable head thickness of refaced valves

2. All valves having less than 50% margin thickness (outer edge of valve head) after refacing has been completed must be replaced. To check this dimension, compare the refaced valve with a new valve.

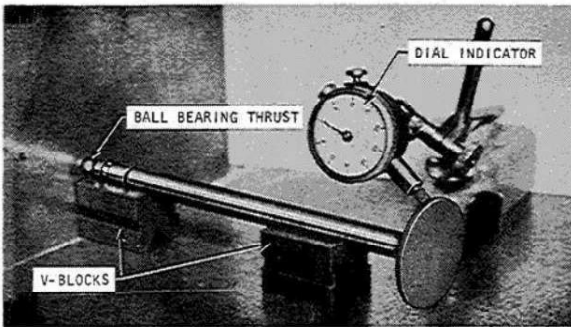


Figure 28 — Checking valve face in "V" blocks

3. Check all refaced or new valves in V-blocks with indicator to determine if the contact face is true with the stem within .002. If not, repeat the refacing operation.

4. After the valves and seats have been refaced and reground, coat the seat lightly with Prussian blue and drop the valve into position, oscillating it slightly to transfer the blue pattern to the valve face. This should show a contact width of $\frac{1}{16}$ " to $\frac{3}{32}$ " and should fall well within the width of the valve face, leaving at least $\frac{1}{64}$ " on either side where

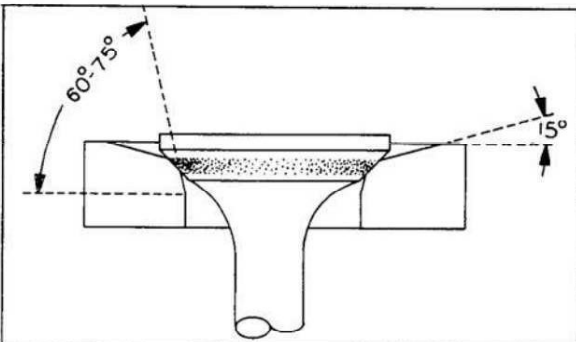


Figure 29 — Method of narrowing valve seats

00M152M

the blue does not show. If the contact is over $\frac{3}{32}$ " wide, the seat in the head may be narrowed by using a 15° stone to reduce the outside diameter or using a 60° or 75° stone to increase the inside diameter.

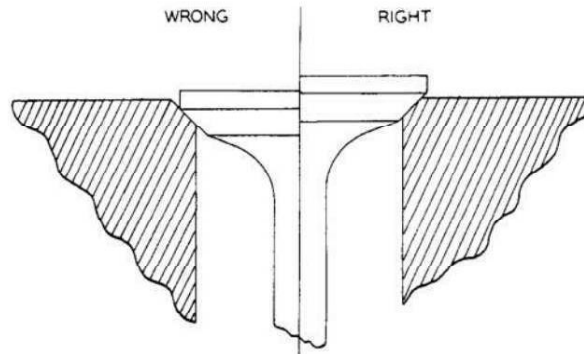


Figure 30 — Valve position in block

Never allow valves to set down inside the seat.

After the narrowed-down seat is brought within specifications, the seat should be retouched lightly with the original stone to remove burrs or feathered edge.

"A poor valve grinding job cannot be corrected by valve lapping."

5. Coat the valve stem with a light film of engine oil.

VALVE SPRINGS

1. Check all valve springs on a spring tester to make sure they meet specifications regarding weight and length. Springs, when compressed to the "valve open" or "valve closed" length, must fall within the specifications shown on the chart when new, and must not show more than 10% loss to re-use.




Figure 31 — Valve spring tester

2. Reassemble the valves and springs in the block with the retainer and retainer lock.

CHECKING BORE WEAR

1. Clean the ring of carbon from around the top of the cylinder bore formed above the travel of the top ring.
2. Determine the original diameter of the cylinder barrel by checking this unworn area with a pair of inside micrometers at intervals of approximately 45°.

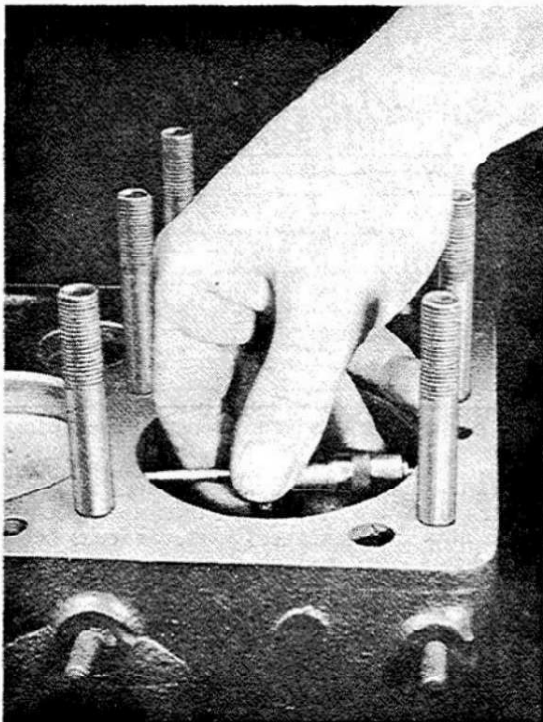


Figure 32 — Measuring original bore diameter above ring travel

3. Check in same manner the top of the ring travel area approximately 1/4" below the shoulder.
4. The maximum difference in the above checks, indicates the amount of cylinder bore wear. If less than .008, re-ringing will be suitable and if over .008 re-boring is recommended.

PREPARING CYLINDER WALLS FOR RE-RINGING OR REBORING

1. Ridge ream the cylinders to remove the unworn area at the top so that the new rings when assembled will not bump and distort both themselves and the piston lands.

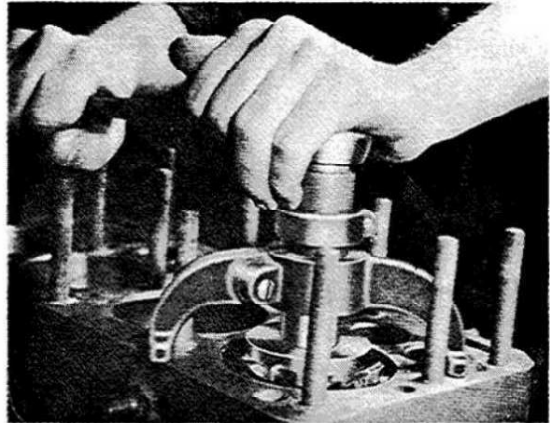


Figure 33 — Ridge reaming top of cylinder bore

Several good makes of ridge reamers are available which will ream the top of the bore in direct relation to the worn area so that should the worn area be off center slightly there will be no partial ridge remaining.

2. Drain the crankcase and remove the oil pan.
3. Remove the cap screws holding the connecting rod caps to the rod. *Keep the cap and bolts in numerical order so that when the pistons and rods are removed from the engine, the cap can be reassembled and kept with its mating part.*
4. Push the pistons and connecting rods up through the top of the cylinder, carrying with them all the carbon and metal chips left from the cleaning and ridge reaming operation. *When doing this, every precaution must be taken to prevent damage to cylinder bores by the sharp corners and rough edges of the connecting rods and bolts.*
5. To get the correct cross hatch pattern with a cylinder hone, use a top quality electric drill with a speed of 500 RPM or less.

It is important to remove the glaze on the cylinder bores by using a cylinder hone, with an adjustable stone tension, (see illustration), in order to assure quick seating of the new piston rings. If the cylinder glaze is not removed, you will have no assurance as to when the rings will begin to function properly and control the oil; this is especially true when chrome rings are used.

The following step by step procedure is recommended:

a. Cover the entire crankshaft with a clean, slightly oily cloth to prevent abrasives and dirt from getting on the crankshaft.

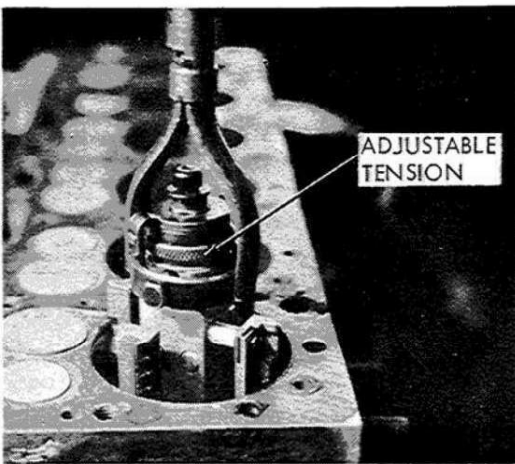


Figure 34 — Honing cylinders

b. Remove the excess carbon deposits from the top of the cylinder wall before beginning the glaze breaking operation. (This is to prevent loading the stones.)

c. Insert hone in cylinder and expand to cylinder wall with slight tension. Using a clean brush, wet cylinder wall and stones with kerosene. Use a hand drill and surface hone cylinder with a rapid up and down motion to produce a good cross hatch pattern. Apply kerosene occasionally as needed and increase tension on hone adjustment until a good pattern and finish is obtained. A smooth finish of 10 to 15 micro inches is desired.

d. Clean the loose abrasives from the stones by using kerosene and a wire brush.

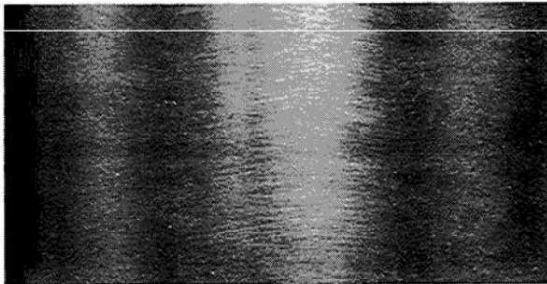


Figure 35 — Desirable cross hatch pattern obtained with a cylinder hone

IMPORTANT

Stones must be used wet. Keep applying kerosene during honing to prevent stones from drying out and causing an incorrect honing pattern.

e. The most desirable cylinder finish is 10-15 micro inches; with this finish the depressions in the surface tend to keep the supply of lubrication between the mating parts. This finish can be obtained by using 280 grit stones on the hone.

f. Clean all bores thoroughly with a clean oiled rag to pick up all the small particles of dust that may be embedded in the walls. Follow this with a clean cloth to make certain the walls are **CLEAN**.

PISTONS

Check the pistons for excessive ring groove wear, and replace any that exceed the allowable limits in our limits and clearance data.

The cylinder walls and pistons must be perfectly clean and dry when fitting pistons in the cylinder bores. Pistons should be fitted with the block and piston at room temperature (68° - 70° F).

PISTON FIT ON STANDARD PISTONS*
(with 5 to 10# Pull)

N-Y Series	.002
F4, F6 Series	.003
M271	.004
M330	.005
M363	.003
B Series	.005

*This fit may vary on some special applications.

Check the piston fit in the bore using a half-inch wide strip of feeler stock, of the thickness specified in the Limits and Clearance Chart, the feeler being attached to a small scale of approximately 15 lbs. capacity.

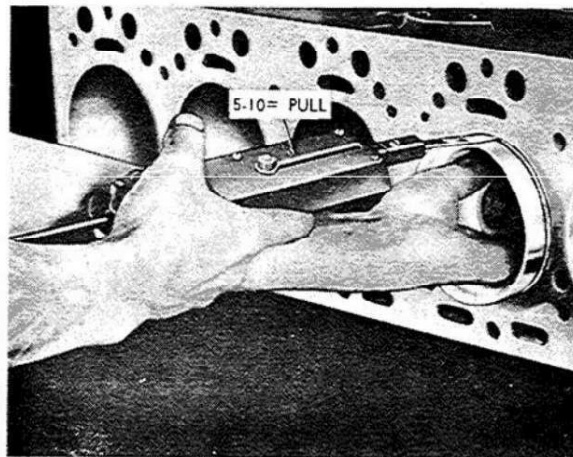


Figure 36 — Checking Piston fit in bore