

# Shop Manual

FORKLIFT TRUCK    **FB10RL(F)/13RL(F)    -15**  
                         **FB15RL(F)/18RL(F)    -15**  
                         **FB10RW/13RW/15RW -15**

SERIAL NUMBERS    150001    and up

**KOMATSU**



# SECTION INDEX

**00. FOREWORD**

**10. GENERAL AND SPECIFICATIONS**

**20. TESTING AND ADJUSTING**

**30. REMOVAL AND INSTALLATION**

**40. DISASSEMBLY AND ASSEMBLY**

**50. MAINTENANCE STANDARD**

**60. STRUCTURE AND FUNCTION**

**70. TROUBLESHOOTING**


**80. YEARLY INSPECTION CRITERIA**

**90. CONVERSION TABLE**

## PRECAUTIONS WHEN PERFORMING THE SERVICE WORK

Always pay attention to “Safety” before starting any work — this is important.







Never attempt any work where danger to yourself or to other persons.

Whenever work requiring safety precautions are described in this manual, a flag mark  inserted, always make double sure that safety measures are taken.

Other unmarked work, should always be performed after studying and using your common sense to prevent accidents.

## DESCRIPTION OF THE SYMBOLS

The symbols described below are used in this manual for convenience and better understanding.

Symbol	Item	Description
	<b>Safety</b>	Special safety precautions are needed to perform the work.
	<b>Note</b>	Special technical precautions are needed to perform the work
	<b>Tightening torque</b>	Fastening parts that require specified tightening force when assembling.
	<b>Weight</b>	Weight of parts or systems
	<b>Coat</b>	Places to be coated with adhesives, etc. when assembling
	<b>Filling</b>	Oil filling and its amount

# 10. GENERAL AND SPECIFICATIONS

SPECIFICATION.....	10-2
SAFETY ITEMS FOR MAINTENANCE .....	10-7
STANDARD TIGHTENING TORQUE FOR BOLTS .....	10-14
STANDARD TIGHTENING TORQUE FOR PIPE JOINTS .....	10-15
HOW TO USE LOCTITE.....	10-16

# SPECIFICATION

## 1.Main specification

Characteristics	1.2	Model	Manufacturer's Designation		FB10RL-15, FB10RLF-15	FB13RL-15, FB13RLF-15	
	1.3	Power Type	Electric, Diesel, Gasoline, LPG, Cable		Electric	Electric	
	1.4	Operation Type	Pedestrian, Driver Standing, Sitting, Order Picking		Standing	Standing	
	1.5	Rated Capacity	Q1	Rated Capacity	kg	1000	1250
	1.6	Load Center	c	Load Center	mm	500	500
	1.6.1	Alternative Capacity	Q2	Capacity@600mm Load Center	kg	870	1080
	1.8	Load Distance	x	Front Axle Center to Fork Face	mm	175	175
	1.9	Wheelbase	y		mm	1110	1250
	Weight	2.1	Service Weight	Including Min. Capacity Battery, see line 6.5		kg	1985
2.4		Axle Loading Mast/Forks Extended	Loaded	Front	kg	2555	2855
2.4.1				Rear	kg	465	430
2.4.2			Unloaded	Front	kg	905	890
2.4.3				Rear	kg	1115	1145
2.5		Axle Loading Mast/Forks Retracted	Loaded	Front	kg	1940	2020
2.5.1				Rear	kg	1080	1265
2.5.2			Unloaded	Front	kg	690	635
2.5.3				Rear	kg	1330	1400
Tyre	3.1	Tyre Type			Solid	Solid	
	3.2	Tyre Size	Front		φ 260 x 120	φ 260 x 120	
	3.3		Rear		φ 360 x 180	φ 360 x 180	
	3.4		Additional Wheels		φ 127 x 90	φ 127 x 90	
	3.5	Number of Wheel	Front/Rear(*=driven)		2/1*+2	2/1*+2	
	3.6	Tread, Front	b10	mm	975	975	
	3.7	Tread, Rear	b11	mm	—	—	
Dimensions	4.1	Tilting Angle	α/β	Forward/Backward	degree	3/5	3/5
	4.2	Mast Height, Lowered	h5	with Std. Mast	mm	1995	1995
	4.3	Std. Free Lift	h2	with Std. Mast, from Ground	mm	105	105
	4.4	Std. Lift Height	h3	with Std. Mast, from Ground	mm	3000	3000
	4.5	Mast Height, Extended	h4	with Std. Mast	mm	3935	3935
	4.7	Height, Overhead Guard	h1		mm	2245	2245
	4.19	Length, with Std. Forks	l 1		mm	1905	1905
	4.21	Width, at Tyre	b1		mm	1095	1095
	4.22	Forks	s/e/l	Thickness/Width/Length	mm	35x100x850	35x100x850
	4.23	Fork Carriage Class	ISO 2328, Type A/B/no		Pin Mount	Pin Mount	
	4.24	Width, Fork Carriage	b3		mm	750	750
	4.26	Width, between Reach Legs	b4		mm	752	752
	4.28	Reach Travel	l 4		mm	440	580
	4.31	Ground Clearance	m1	under the Mast	mm	75	75
	4.32		m2	at the center of Wheelbase	mm	80	80
	4.33	Right Angle Stacking	Ast	with L1000 x W1200 pallet	mm	2275	2310
	4.34	Aisle	Ast	with L1200 x W800 pallet	mm	2340	2355
	4.35.1	Turning Radius	Wa		mm	1325	1465
	4.35.2		Wb		mm	670	555
	4.37	Length, without Forks	/7			1470	1610
Performance	5.1	Travel Speed (FWD)	Loaded/Unloaded		km/h	9.5/10.5	9.5/10.5
	5.2	Lifting Speed	Loaded/Unloaded		mm/s	350/540	320/540
	5.3	Lowering Speed	Loaded/Unloaded		mm/s	500/550	460/550
	5.4	Reach Speed	Loaded/Unloaded		mm/s	300/300	300/300
	5.6	Max. Drawbar Pull	3min rating		N	5880	5880
	5.8	Max. Gradeability	Unloaded 1.5km/h, 3min rating		%	32	31
	5.10	Service Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc	
	5.11	Parking Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc	
	5.12	Steering	Operation/Control		Electric Power Steering	Electric Power Steering	
Drive	6.1	Drive Motor (AC)	60min rating		kW	4.5	4.5
	6.2	Pump Motor (AC)	5min rating		kW	9	9.0
	6.2.1	PS Motor (DC)	60min rating		kW	0.3	0.3
	6.4	Battery Voltage			V	48	48
	6.4.1	Battery Capacity, Min.			Ah/5-hour	201	201
	6.4.2	Battery Capacity, Max.			Ah/5-hour	240	240
	6.5	Battery Weight, Min. Capacity			kg	365	365
Others	8.1	Drive Motor Control			MOS-FET inverter	MOS-FET inverter	
	8.1.1	Pump Motor Control			MOS-FET inverter	MOS-FET inverter	
	8.1.2	PS Motor Control			MOS-FET chopper	MOS-FET chopper	
	8.2	Relief Pressure for Attachment			bar	167	167
	8.2.1	Hydraulic Tank Capacity			Ltr	16	16

4.33 and 4.34 Values are not including a clearance. See Aisle width section for detail.

Characteristics	1.2	Model	Manufacturer's Designation		FB15RL-15, FB15RLF-15	FB18RL-15, FB18RLF-15	
	1.3	Power Type	Electric, Diesel, Gasoline, LPG, Cable		Electric	Electric	
	1.4	Operation Type	Pedestrian, Driver Standing, Sitting, Order Picking		Standing	Standing	
	1.5	Rated Capacity	Q1	Rated Capacity kg	1500	1800	
	1.6	Load Center	c	Load Center mm	500	500	
	1.6.1	Alternative Capacity	Q2	Capacity@600mm Load Center kg	1300	1560	
	1.8	Load Distance	x	Front Axle Center to Fork Face mm	175	175	
	1.9	Wheelbase	y	mm	1350	1500	
Weight	2.1	Service Weight	Including Min. Capacity Battery, see line 6.5		kg	2175	2255
	2.4	Axle Loading Mast/Forks Extended	Loaded	Front	kg	3245	3620
	2.4.1			Rear	kg	475	480
	2.4.2		Unloaded	Front	kg	955	970
	2.4.3			Rear	kg	1265	1330
	2.5	Axle Loading Mast/Forks Retracted	Loaded	Front	kg	2360	2465
	2.5.1			Rear	kg	1360	1635
	2.5.2		Unloaded	Front	kg	715	690
2.5.3	Rear			kg	1505	1610	
Tyre	3.1	Tyre Type			Solid	Solid	
	3.2	Tyre Size	Front		φ 254 x 114	φ 254 x 120	
	3.3		Rear		φ 360 x 180	φ 360 x 180	
	3.4		Additional Wheels		φ 127 x 90	φ 127 x 90	
	3.5	Number of Wheel	Front/Rear(*=driven)		2/1*+2	2/1*+2	
	3.6	Tread, Front	b10	mm	975	975	
	3.7	Tread, Rear	b11	mm	-	-	
Dimensions	4.1	Tilting Angle	α/β	Forward/Backward degree	3/5	3/5	
	4.2	Mast Height, Lowered	h5	with Std. Mast mm	1995	1995	
	4.3	Std. Free Lift	h2	with Std. Mast, from Ground mm	105	105	
	4.4	Std. Lift Height	h3	with Std. Mast, from Ground mm	3000	3000	
	4.5	Mast Height, Extended	h4	with Std. Mast mm	3935	3935	
	4.7	Height, Overhead Guard	h1	mm	2245	2245	
	4.19	Length, with Std. Forks	l 1	mm	2005	2075	
	4.21	Width, at Tyre	b1	mm	1095	1095	
	4.22	Forks	s/e/l	Thickness/Width/Length mm	35x100x850	38x100x850	
	4.23	Fork Carriage Class	ISO 2328, Type A/B/no		Pin Mount	Pin Mount	
	4.24	Width, Fork Carriage	b3	mm	750	730	
	4.26	Width, between Reach Legs	b4	mm	752	752	
	4.28	Reach Travel	l 4	mm	580	730	
	4.31	Ground Clearance	m1	under the Mast mm	75	75	
	4.32		m2	at the center of Wheelbase mm	80	80	
	4.33	Right Angle Stacking	Ast	with L1000 x W1200 pallet mm	2405	2460	
	4.34	Aisle	Ast	with L1200 x W800 pallet mm	2450	2475	
	4.35.1	Turning Radius	Wa	mm	1560	1715	
	4.35.2		Wb	mm	555	555	
	4.37	Length, without Forks	/7		1710	1860	
	Performance	5.1	Travel Speed (FWD)	Loaded/Unloaded km/h		9.5/10.5	9.5/10.5
5.2		Lifting Speed	Loaded/Unloaded mm/s		320/540	300/540	
5.3		Lowering Speed	Loaded/Unloaded mm/s		460/550	460/550	
5.4		Reach Speed	Loaded/Unloaded mm/s		300/300	300/300	
5.6		Max. Drawbar Pull	3min rating	N	5880	5880	
5.8		Max. Gradeability	Unloaded 1.5km/h, 3min rating	%	28	27	
5.10		Service Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc	
5.11		Parking Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc	
5.12	Steering	Operation/Control		Electric Power Steering	Electric Power Steering		
Drive	6.1	Drive Motor (AC)	60min rating kW		4.5	4.5	
	6.2	Pump Motor (AC)	5min rating kW		9.0	9.0	
	6.2.1	PS Motor (DC)	60min rating kW		0.3	0.3	
	6.4	Battery Voltage	V		48	48	
	6.4.1	Battery Capacity, Min.	Ah/5-hour		280	280	
	6.4.2	Battery Capacity, Max.	Ah/5-hour		390	390	
	6.5	Battery Weight, Min. Capacity	kg		495	495	
Others	8.1	Drive Motor Control			MOS-FET inverter	MOS-FET inverter	
	8.1.1	Pump Motor Control			MOS-FET inverter	MOS-FET inverter	
	8.1.2	PS Motor Control			MOS-FET chopper	MOS-FET chopper	
	8.2	Relief Pressure for Attachment	bar		167	167	
	8.2.1	Hydraulic Tank Capacity	Ltr		16	16	

4.33 and 4.34 Values are not including a clearance. See Aisle width section for detail

Characteristics	1.2	Model	Manufacturer's Designation		FB10RW-15	FB13RW-15
	1.3	Power Type	Electric, Diesel, Gasoline, LPG, Cable		Electric	Electric
	1.4	Operation Type	Pedestrian, Driver Standing, Sitting, Order Picking		Standing	Standing
	1.5	Rated Capacity	Q1	Rated Capacity kg	1000	1250
	1.6	Load Center	c	Load Center mm	500	500
	1.6.1	Alternative Capacity	Q2	Capacity@600mm Load Center kg	870	1080
	1.8	Load Distance	x	Front Axle Center to Fork Face mm	175	175
	1.9	Wheelbase	y	mm	1110	1250
	Weight	2.1	Service Weight	Including Min. Capacity Battery, see line 6.5		1985
2.4		Axle Loading Mast/Forks Extended	Loaded	Front kg	2560	2860
2.4.1				Rear kg	460	425
2.4.2			Unloaded	Front kg	910	895
2.4.3				Rear kg	1110	1140
2.5		Axle Loading Mast/Forks Retracted	Loaded	Front kg	1945	2025
2.5.1				Rear kg	1075	1260
2.5.2			Unloaded	Front kg	695	640
2.5.3	Rear kg			1325	1395	
Tyre	3.1	Tyre Type			Solid	Solid
	3.2	Tyre Size	Front		φ 260 x 120	φ 260 x 120
	3.3		Rear		φ 330 x 145	φ 330 x 145
	3.4		Additional Wheels		φ 150 x 80	φ 150 x 80
	3.5	Number of Wheel	Front/Rear(*=driven)		2/1*+2	2/1*+2
	3.6	Tread, Front	b10	mm	975	975
	3.7	Tread, Rear	b11	mm	-	-
Dimensions	4.1	Tilting Angle	α/β	Forward/Backward degree	3/5	3/5
	4.2	Mast Height, Lowered	h5	with Std. Mast mm	1995	1995
	4.3	Std. Free Lift	h2	with Std. Mast, from Ground mm	105	105
	4.4	Std. Lift Height	h3	with Std. Mast, from Ground mm	3000	3000
	4.5	Mast Height, Extended	h4	with Std. Mast mm	3935	3935
	4.7	Height, Overhead Guard	h1	mm	2245	2245
	4.19	Length, with Std. Forks	l 1	mm	1905	1905
	4.21	Width, at Tyre	b1	mm	1080	1080
	4.22	Forks	s/e/l	Thickness/Width/Length mm	35x100x850	35x100x850
	4.23	Fork Carriage Class	ISO 2328, Type A/B/no		Pin Mount	Pin Mount
	4.24	Width, Fork Carriage	b3	mm	750	750
	4.26	Width, between Reach Legs	b4	mm	752	752
	4.28	Reach Travel	l 4	mm	440	580
	4.31	Ground Clearance	m1	under the Mast mm	75	75
	4.32		m2	at the center of Wheelbase mm	80	80
	4.33	Right Angle Stacking	Ast	with L1000 x W1200 pallet mm	2275	2310
	4.34	Aisle	Ast	with L1200 x W800 pallet mm	2340	2355
	4.35.1	Turning Radius	Wa	mm	1325	1465
	4.35.2		Wb	mm	670	555
	4.37	Length, without Forks	/7		1470	1610
Performance	5.1	Travel Speed (FWD)	Loaded/Unloaded km/h		9.5/10.5	9.5/10.5
	5.2	Lifting Speed	Loaded/Unloaded mm/s		350/540	320/540
	5.3	Lowering Speed	Loaded/Unloaded mm/s		500/550	460/550
	5.4	Reach Speed	Loaded/Unloaded mm/s		300/300	300/300
	5.6	Max. Drawbar Pull	3min rating	N	6080	6080
	5.8	Max. Gradeability	Unloaded 1.5km/h, 3min rating %		32	32
	5.10	Service Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc
	5.11	Parking Brake	Operation/Control		Mechanical, Disc	Mechanical, Disc
5.12	Steering	Operation/Control		Electric Power Steering	Electric Power Steering	
Drive	6.1	Drive Motor (AC)	60min rating	kW	4.5	4.5
	6.2	Pump Motor (AC)	5min rating	kW	9.0	9.0
	6.2.1	PS Motor (DC)	60min rating	kW	0.3	0.3
	6.4	Battery Voltage		V	48	48
	6.4.1	Battery Capacity, Min.		Ah/5-hour	201	201
	6.4.2	Battery Capacity, Max.		Ah/5-hour	240	240
	6.5	Battery Weight, Min. Capacity		kg	365	365
Others	8.1	Drive Motor Control			MOS-FET inverter	MOS-FET inverter
	8.1.1	Pump Motor Control			MOS-FET inverter	MOS-FET inverter
	8.1.2	PS Motor Control			MOS-FET chopper	MOS-FET chopper
	8.2	Relief Pressure for Attachment		bar	167	167
	8.2.1	Hydraulic Tank Capacity		Ltr	16	16

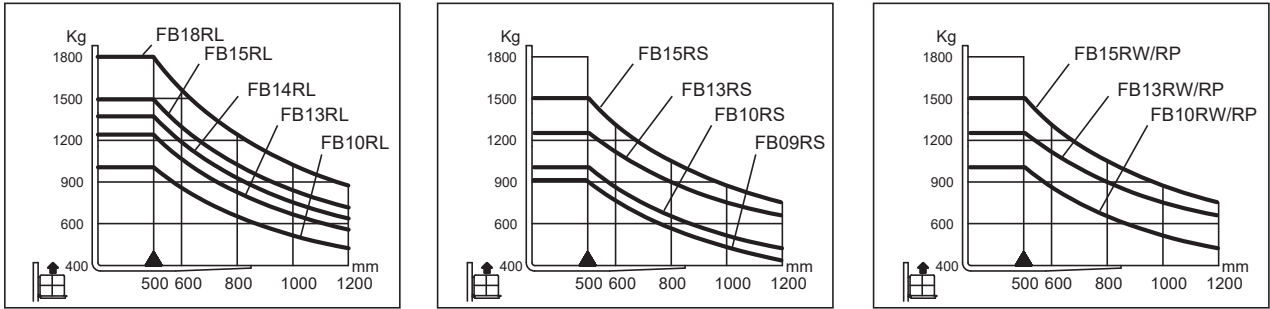
4.33 and 4.34 Values are not including a clearance. See Aisle width section for detail



Characteristics	1.2	Model	Manufacturer's Designation		FB15RW-15
	1.3	Power Type	Electric, Diesel, Gasoline, LPG, Cable		Electric
	1.4	Operation Type	Pedestrian, Driver Standing, Sitting, Order Picking		Standing
	1.5	Rated Capacity	Q1	Rated Capacity	kg 1500
	1.6	Load Center	c	Load Center	mm 500
	1.6.1	Alternative Capacity	Q2	Capacity@600mm Load Center	kg 1300
	1.8	Load Distance	x	Front Axle Center to Fork Face	mm 175
	1.9	Wheelbase	y		mm 1350
Weight	2.1	Service Weight	Including Min. Capacity Battery, see line 6.5		kg 2185
	2.4			Front	kg 3250
	2.4.1	Axle Loading Mast/Forks Extended	Loaded	Rear	kg 470
	2.4.2				
	2.4.3	Unloaded		Front	kg 955
	2.5			Rear	kg 1265
	2.5.1	Axle Loading Mast/Forks Retracted	Loaded	Front	kg 2365
	2.5.2			Rear	kg 1355
	2.5.3		Unloaded	Front	kg 720
Tyre	3.1	Tyre Type			Solid
	3.2		Front		φ 254 x 114
	3.3	Tyre Size	Rear		φ 330 x 145
	3.4		Additional Wheels		φ 150 x 80
	3.5	Number of Wheel	Front/Rear(*=driven)		2/1*+2
	3.6	Tread, Front	b10	mm	975
	3.7	Tread, Rear	b11	mm	-
Dimensions	4.1	Tilting Angle	α/β	Forward/Backward	degree 3/5
	4.2	Mast Height, Lowered	h5	with Std. Mast	mm 1995
	4.3	Std. Free Lift	h2	with Std. Mast, from Ground	mm 105
	4.4	Std. Lift Height	h3	with Std. Mast, from Ground	mm 3000
	4.5	Mast Height, Extended	h4	with Std. Mast	mm 3935
	4.7	Height, Overhead Guard	h1		mm 2245
	4.19	Length, with Std. Forks	l 1		mm 2005
	4.21	Width, at Tyre	b1		mm 1080
	4.22	Forks	s/e/l	Thickness/Width/Length	mm 35x100x850
	4.23	Fork Carriage Class	ISO 2328, Type A/B/no		Pin Mount
	4.24	Width, Fork Carriage	b3	mm	750
	4.26	Width, between Reach Legs	b4	mm	752
	4.28	Reach Travel	l 4	mm	580
	4.31	Ground Clearance	m1	under the Mast	mm 75
	4.32		m2	at the center of Wheelbase	mm 80
	4.33	Right Angle Stacking Aisle	Ast	with L1000 x W1200 pallet	mm 2405
	4.34		Ast	with L1200 x W800 pallet	mm 2450
	4.35.1	Turning Radius	Wa	mm	1560
	4.35.2		Wb	mm	555
Performance	4.37	Length, without Forks	/7		mm 1710
	5.1	Travel Speed (FWD)	Loaded/Unloaded		km/h 9.5/10.5
	5.2	Lifting Speed	Loaded/Unloaded		mm/s 320/540
	5.3	Lowering Speed	Loaded/Unloaded		mm/s 460/550
	5.4	Reach Speed	Loaded/Unloaded		mm/s 300/300
	5.6	Max. Drawbar Pull	3min rating	N	6080
	5.8	Max. Gradeability	Unloaded 1.5km/h, 3min rating		% 29
	5.10	Service Brake	Operation/Control		Mechanical, Disc
	5.11	Parking Brake	Operation/Control		Mechanical, Disc
Drive	5.12	Steering	Operation/Control		Electric Power Steering
	6.1	Drive Motor (AC)	60min rating		kW 4.5
	6.2	Pump Motor (AC)	5min rating		kW 9.0
	6.2.1	PS Motor (DC)	60min rating		kW 0.3
	6.4	Battery Voltage			V 48
	6.4.1	Battery Capacity, Min.	Ah/5-hour		280
	6.4.2	Battery Capacity, Max.	Ah/5-hour		390
Others	6.5	Battery Weight, Min. Capacity			kg 495
	8.1	Drive Motor Control			MOS-FET inverter
	8.1.1	Pump Motor Control			MOS-FET inverter
	8.1.2	PS Motor Control			MOS-FET chopper
	8.2	Relief Pressure for Attachment	bar		167
	8.2.1	Hydraulic Tank Capacity	Ltr		16

4.33 and 4.34 Values are not including a clearance. See Aisle width section for detail

2. Allowable Load Table



3. Dimension Diagram

